

中性密度滤光片


中性密度滤光片主要用于对光谱内所有谱线激光等比例衰减。中性密度滤光片等比例衰减各谱线激光能量，但不会改变激光空间和频域能量分布。

产品参数

材料	中性密度镜片
尺寸公差	+0/-0.2mm
透光孔径	>90 %
表面质量	60-40 S-D
表面平整度	< λ @632.8 nm
平行度公差	<3 arcmin
倒角	<0.25 mm x 45°
无镀膜；无外环固定	

产品列表

光密度	VIS 平均透射率	产品型号		
		Ø12.7 mm	Ø25.4 mm	50.8x50.8 mm
0.1	80%	OA0045-0001	OA0045-0011	OA0045-0021
0.2	60%	OA0045-0002	OA0045-0012	OA0045-0022
0.3	50%	OA0045-0003	OA0045-0013	OA0045-0023
0.4	40%	OA0045-0004	OA0045-0014	OA0045-0024
0.5	30%	OA0045-0005	OA0045-0015	OA0045-0025
0.8	15%	OA0045-0006	OA0045-0016	OA0045-0026
1	10%	OA0045-0007	OA0045-0017	OA0045-0027
1.5	3%	OA0045-0008	OA0045-0018	OA0045-0028
2	1%	OA0045-0009	OA0045-0019	OA0045-0029
3	0.10%	OA0045-0010	OA0045-0020	OA0045-0030
价格 RMB		询价	询价	询价
由 45 个彩色和中性密度滤光片组成 (Ø25.4mm , CA18mm)				
通用滤光片套装 (45pcs)			OA0043-0115	
价格 RMB			询价	
由 11 个中性密度滤光片组成 (Ø25.4mm , CA18mm)				
中性滤光片套装 (11pcs)			OA0045-0032	
价格 RMB			询价	

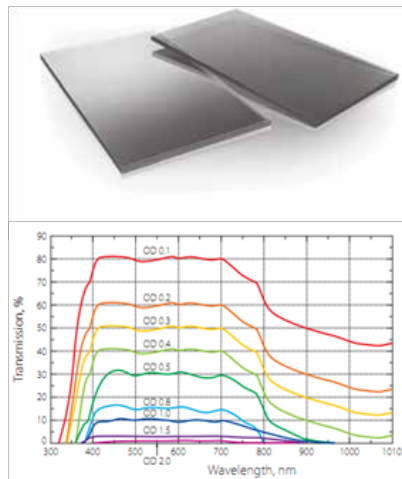

万花筒

- 专用于可见光范围 (400 ~ 700 nm)
- 欧盟进口